




ZiRKON



Heat Insulated Sprue Bush
Applicable for Super Engineering Plastics

Also used as
an ingredient of
PA46 and PA4T

Prevent heat transfer from the nozzle to the mold
allows lower nozzle temperature setting
to prevent the stringing

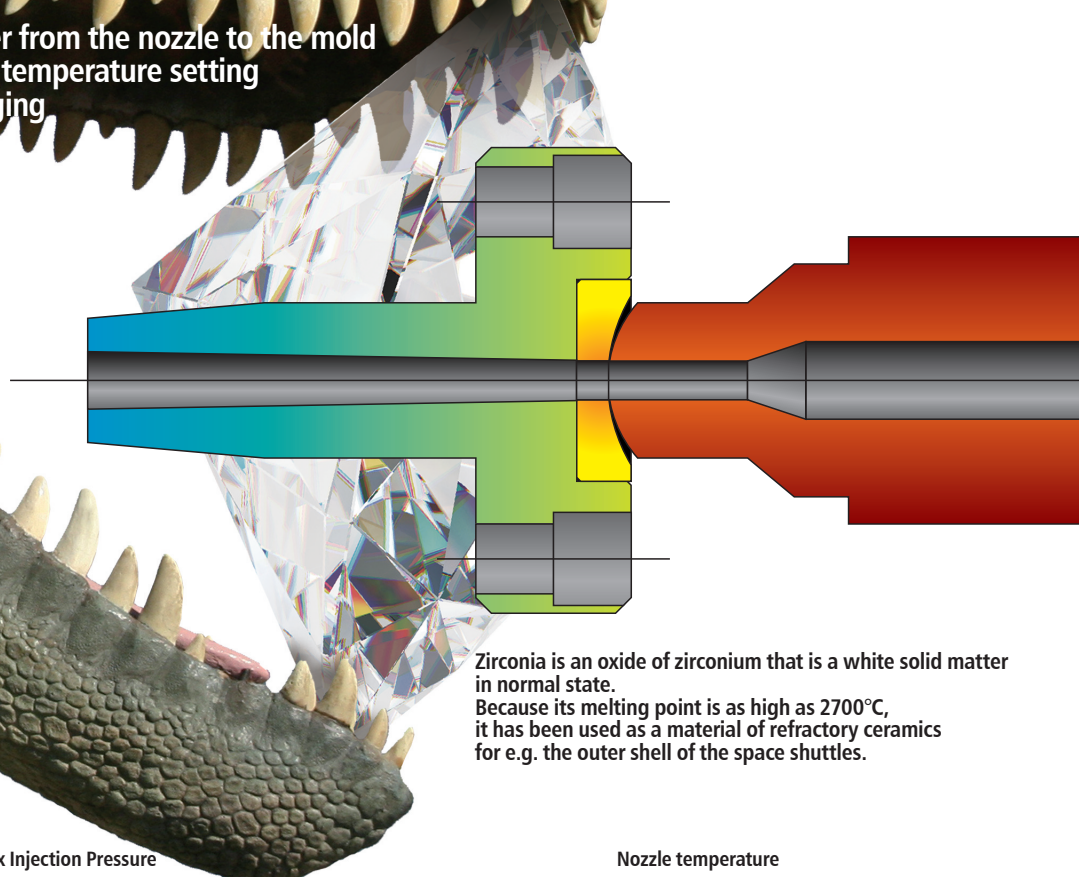

Zirconia is an oxide of zirconium that is a white solid matter in normal state. Because its melting point is as high as 2700°C, it has been used as a material of refractory ceramics for e.g. the outer shell of the space shuttles.


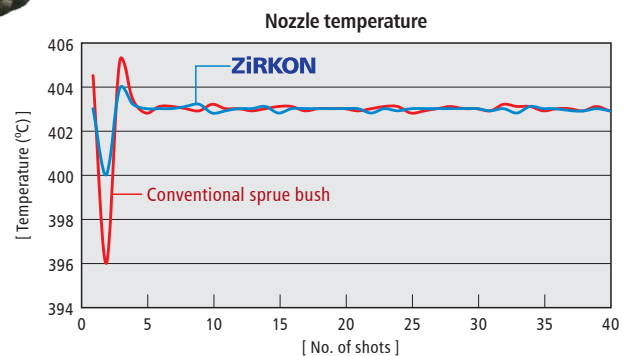
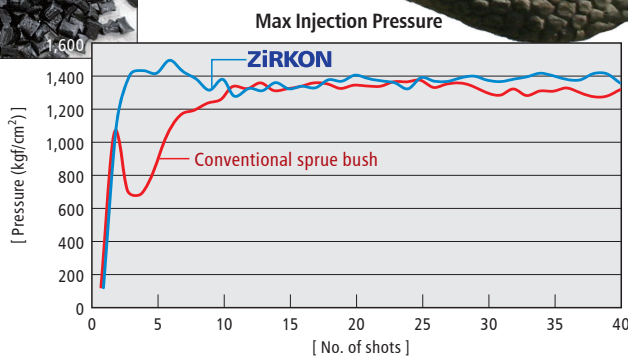


Developed and manufactured by

SPIRAL LOGIC LIMITED www.spirallogic.com.hk

Room G6, Ground Floor, Po Lung Centre, 11 Wang Chiu Road, Kowloon Bay, Hong Kong

Tel: +852-2796-2327 Fax: +852-2796-0064 E-mail: Take5@sph.com.hk

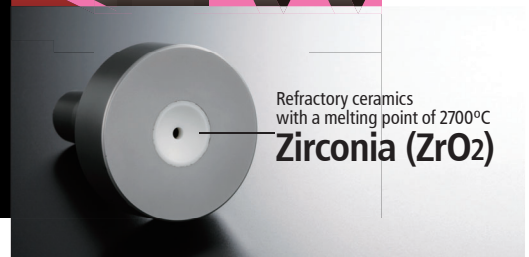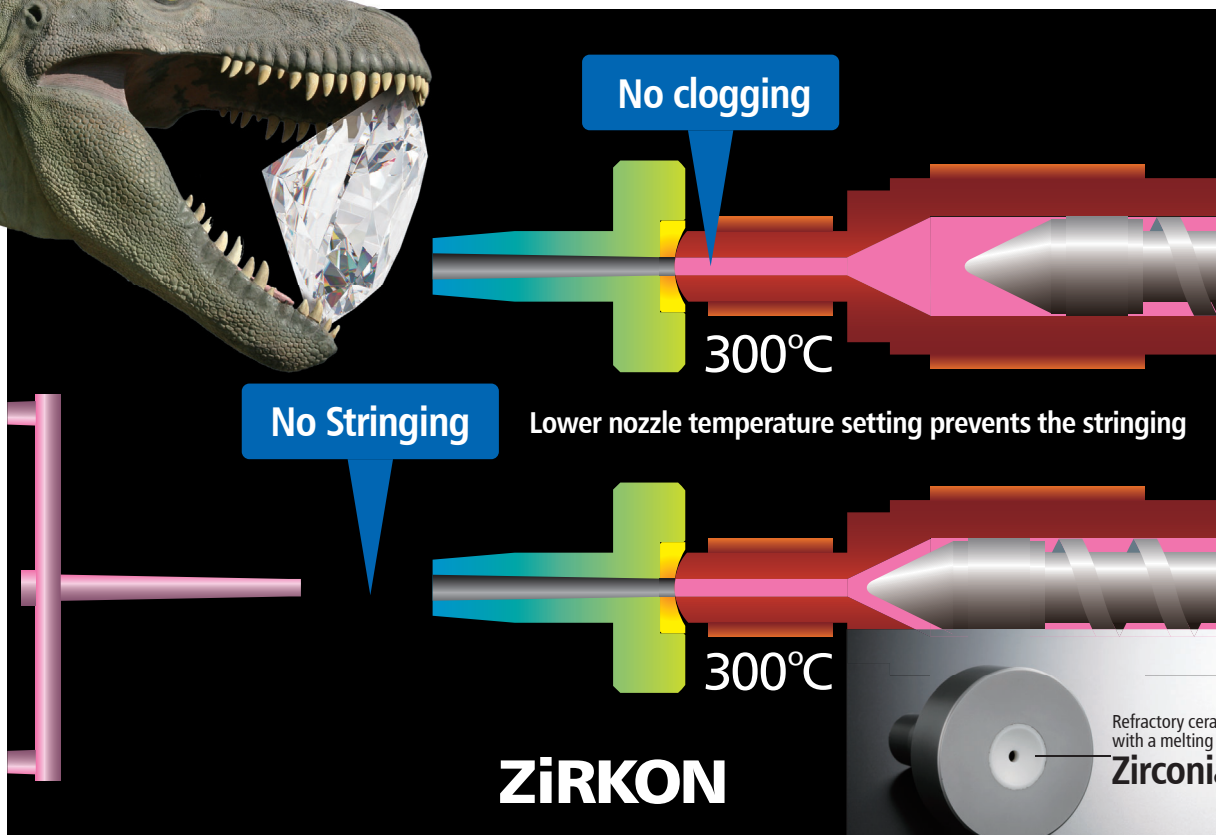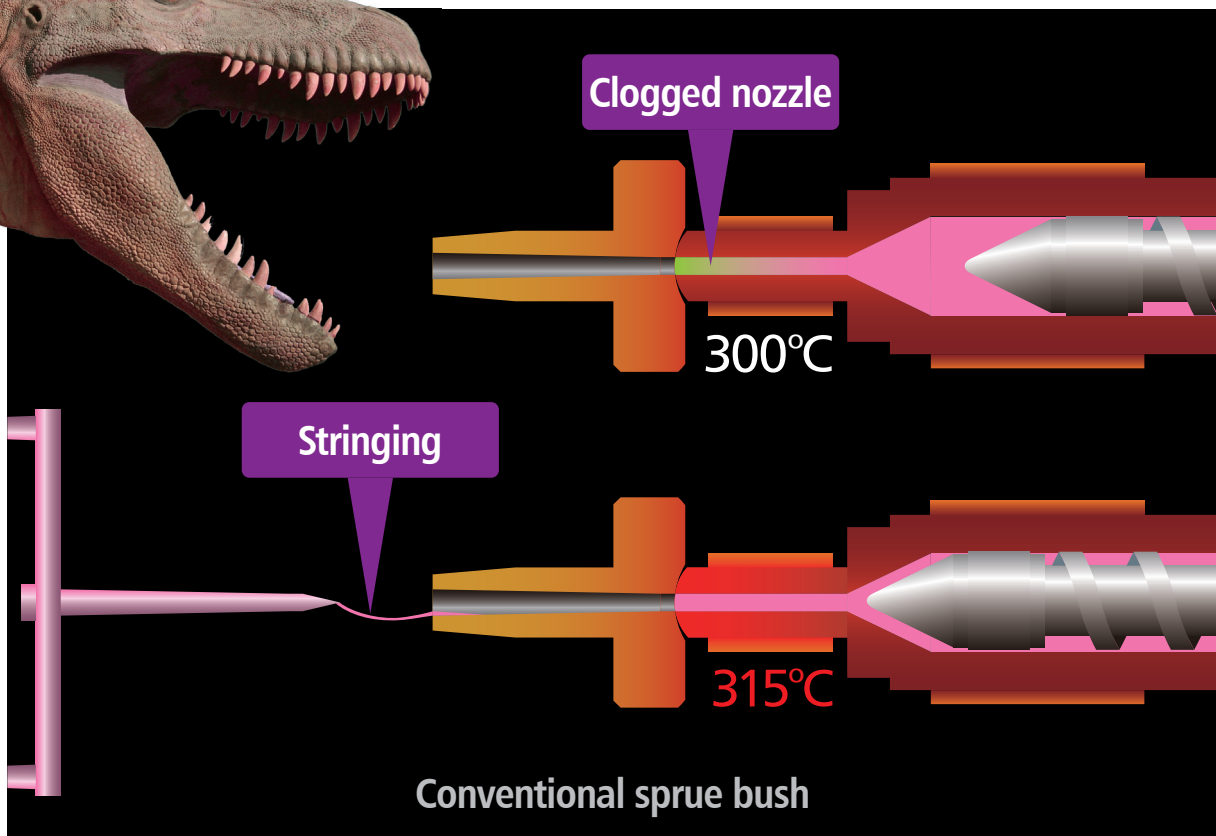

Developed and manufactured by

SPIRAL LOGIC LIMITED
www.spirallogic.com.hk

Sales agent